



شركة المصنع السعودي لأجهزة الإطفاء
SAUDI FACTORY FOR FIRE EQUIPMENT Co.



SFFECO
CO₂
**Fire
Extinguishing
System**



We are very proud to be a vital part of the development of Saudi Arabia and Middle East since **1983** in fire protection industry.

Carbondioxide

Fire Extinguishing System



TABLE OF CONTENTS

NO.	ITEMS	PAGE NO.
I	Table of contents	2
II	CO ₂ agent specification	3
III	High pressure CO ₂ cylinders	4
IV	Single Cylinder Mounting Strap	5
V	CO ₂ cylinder head valve	6
VI	Control head valve	7 - 10
VII	Discharge flexible hose	11
VIII	Pneumatic flexible hose	12
IX	Non return valve	13
X	Discharge Manifold	14
XI	Radial nozzle	15
XII	'S' type discharge nozzle	15
XIII	Abort Switch	16
XIV	Main-Reserve Switch	16
XV	Warning signs	17
XVI	Typical arrangement	18

Rev 7: 10/2019

TECHNICAL DATA SHEET

2

All Pictures and Drawings shown in this document for presentation purpose only. Actual may vary.

In line with our policy of continuous product improvement SFFECO reserves the right to modify specifications without prior notice.

SFFECO Factory & Head Office - Riyadh, KSA:
T: +966 11 265 0070 | F: +966 11 265 2190
riyadh@sffeco.com.sa

SFFECO Global Office, Dubai, UAE:
T: +971 4 880 9890 | F: +971 4 880 9822
sales@sffecoglobal.com

www.
SFFECO.com

Carbondioxide

Fire Extinguishing System



CO₂ AGENT SPECIFICATION

DESCRIPTION

Carbon Dioxide is an odorless, colorless, electrically non-conductive, non-corrosive, and non-deteriorating inert suppression agent. Carbon Dioxide is approximately 50% heavier than air, and is normally present in the atmosphere at about 0.03% by volume. Carbon Dioxide is instrumental in controlling respiration and other vital responses in animals and humans, but it WILL NOT support life.

Carbon Dioxide is a standard commercial product commonly used for carbonating beverages, fast-freezing food products, purging pipes and tanks, medical purposes, and a multitude of additional tasks. It is also used for fire fighting purposes: i.e. hose reels, portable hand extinguishers, and engineered fixed pipe systems. Carbon Dioxide is available in most large cities and seaports throughout the world.

Carbon Dioxide extinguishes fire by reducing the oxygen content of the protected space and/or local flame front to a point where it will not support combustion. Oxygen reduction below 16% by volume will extinguish most fires. Surface or "flash" type fires (oils, paints, etc.) are quickly extinguished. Deep-seated or "smoldering" type fires (paper, baled cotton, clothing, etc.) are extinguished by the prolonged action of a high concentration of Carbon Dioxide. Retaining the agent within the protected space reduces the fire's ability to re-ignite. In addition, Carbon Dioxide has a cooling effect on the surrounding atmosphere that has been found to be a benefit to fire extinguishment.

SPECIFICATION

Chemical Name	: Carbon Dioxide
Chemical Formula	: CO ₂
Molecular Weight	: 44.01
Critical Temperature	: 31.0OC
Boiling Point	: -109.3OF
Vapor Pressure @ 68OF	: 832 PSIG
Vapor Density @ 68OF	: 1.53
Solubility in Water @ 68OF	: 87.8% by Volume
Appearance and Odor	: Colorless Gas, Slight Pungent Odor

All Pictures and Drawings shown in this document for presentation purpose only. Actual may vary.

In line with our policy of continuous product improvement SFFECO reserves the right to modify specifications without prior notice.

Jeddah Branch:

T: +966 12 670 6009 | F: +966 12 676 0307

jeddah@sffeco.com.sa

Dammam Branch:

T: +966 13 835 1961 | F: +966 13 835 1968

dammam@sffeco.com.sa

Madinah Branch:

T: +966 14 866 0959 | F: +966 14 866 0969

madinah@sffeco.com.sa

www.
SFFECO.com

Rev 7: 10/2019

TECHNICAL DATA SHEET

Carbondioxide

Fire Extinguishing System



HIGH PRESSURE CO₂ CYLINDERS

DESCRIPTION

CO₂ cylinders are factory filled to capacity; partial fills are not allowed. The cylinders may be utilized in single or multiple cylinder applications as needed.

Carbondioxide cylinders must be floor mounted, with the discharge valve in the vertical (up) position. Horizontal mounting of cylinders is not allowed. The cylinders may be used in single or multiple cylinder applications as needed.

Cylinders are shipped from the factory with a protective shipping cap in place. Filled cylinders shall be secured during transport and while in storage in accordance with DOT and OSHA requirements. Upon installation, all cylinders shall be secured by cylinder straps or in a suitable racking arrangement. Once secured by a strap or cylinder rack, the safety/shipping cap is removed. The caps should then be stored in a suitable and nearby area for future use.

The high pressure seamless steel CO₂ cylinders has concave base and manufactured in accordance with 84/525 EEC.

MATERIAL

Cylinder: Chrome Molybdenum Steel

Head Valve: Brass


HYDRAULIC TEST PRESSURE

Test Pressure 250 Bar

FINISH

Primed and painted in accordance with BS 4800 : 04 E 53

1. Discharge Valve Assembly (1" NPT)
2. Siphon Tube
3. Cylinder
4. Identification Label

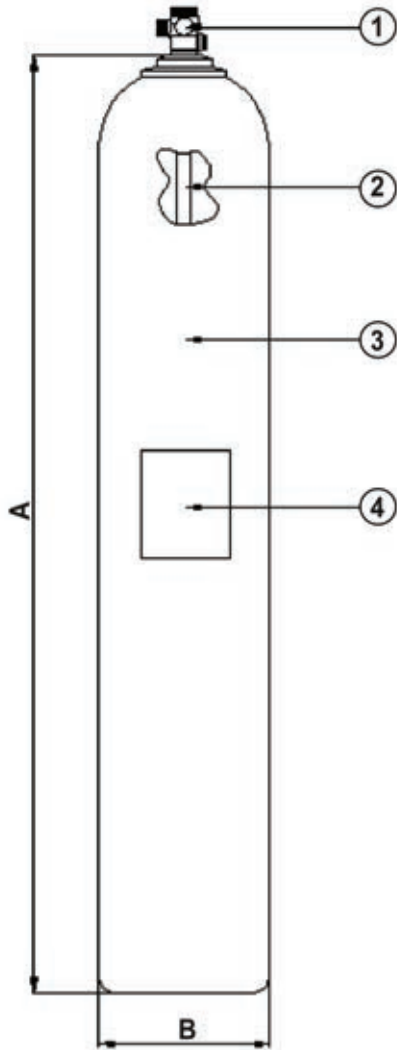

Size : A=1515mm, B= 266mm
Model : SFC-45
Capacity : 45 Kgs

Important Note:

All CO₂ System to be provided with efficient detection system to assure that discharge of gas to be in case of fire only.

Rev 7: 10/2019

TECHNICAL DATA SHEET

4

All Pictures and Drawings shown in this document for presentation purpose only. Actual may vary.

In line with our policy of continuous product improvement SFFECO reserves the right to modify specifications without prior notice.

SFFECO Factory & Head Office - Riyadh, KSA:
T: +966 11 265 0070 | F: +966 11 265 2190
riyadh@sffeco.com.sa

SFFECO Global Office, Dubai, UAE:
T: +971 4 880 9890 | F: +971 4 880 9822
sales@sffecoglobal.com

www.
SFFECO.com

Carbondioxide

Fire Extinguishing System



SINGLE CYLINDER MOUNTING STRAP

APPLICATION

Cylinder straps are used to secure the cylinder in place, on a single cylinder system, in accordance with NFPA 12 requirements. The straps may be secured to any structurally solid surface. Anchoring into plaster or any other facing material is not acceptable.



DESCRIPTION

Cylinder Straps are made of steel, primed and painted red with a baked enamel finish for corrosion resistance. All mounting hardware is supplied by the system installer.

MATERIALS:

Carbon Steel

Paint - Red Gloss Enamel

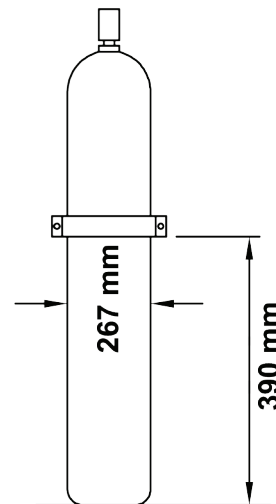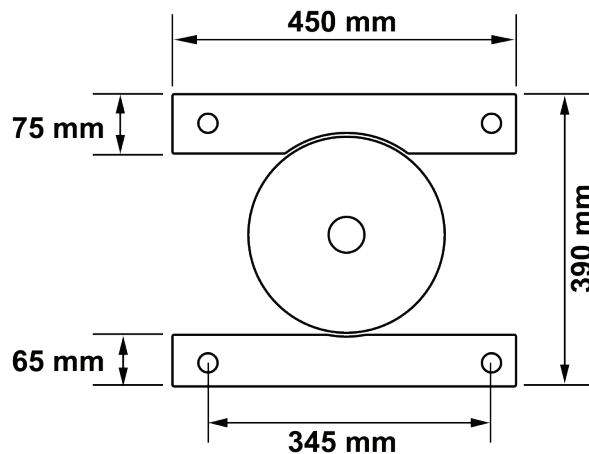

Rev 7: 10/2019

TECHNICAL DATA SHEET

All Pictures and Drawings shown in this document for presentation purpose only. Actual may vary.

In line with our policy of continuous product improvement SFFECO reserves the right to modify specifications without prior notice.

Jeddah Branch:

T: +966 12 670 6009 | F: +966 12 676 0307

jeddah@sffeco.com.sa

Dammam Branch:

T: +966 13 835 1961 | F: +966 13 835 1968

dammam@sffeco.com.sa

Madinah Branch:

T: +966 14 866 0959 | F: +966 14 866 0969

madinah@sffeco.com.sa

www.
SFFECO.com

Carbondioxide

Fire Extinguishing System



CO₂ CYLINDER HEAD VALVE

VALVE FOR FIXED INSTALLATION

SFFECO Carbon Dioxide cylinders are equipped with a cylinder valve designed to hold the Carbon Dioxide agent in the cylinder until actuated, either automatically or manually. The conversion is completed by installing an emergency manual lever actuator.

The cylinder valve assembly has a forged brass body. The pressure necessary to open the valve is 100-110 psig (689-758 kPa) at 70 °F. (21.1 °C.). All cylinder valves are equipped with a Safety Relief Disc that will rupture to relieve excess pressure should it reach a level in excess of 2,650 psi (18,248 kPa) in accordance with NFPA 12, Section 1-8.5.2.




P/N: F2021002

Material : Brass
Thread : 25E - W21, 8x 1/14"
Test Pressure : 360 Bar

Can be used in Combination with any one of the

- P/N: XF11280
- P/N: F1120016
- P/N: F1120015

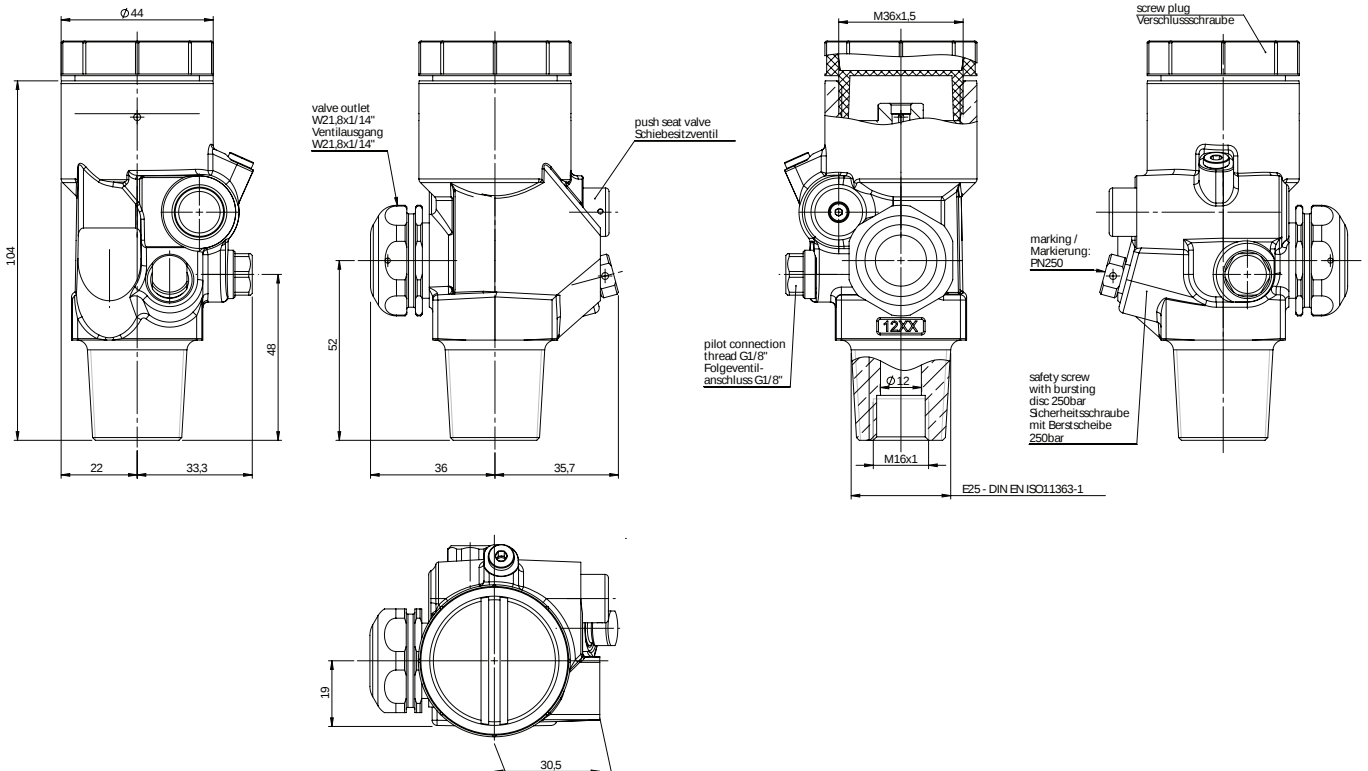

Carbondioxide

Fire Extinguishing System



CONTROL HEAD VALVE

ELECTRICAL AND PRESSURE OPERATED CONTROL HEAD VALVE

This type of control head valve operates the system cylinder electrically through electrical solenoid actuator after receiving an electronic initiating signal from the control panel. Also this type of control head valve operates the system cylinder through electrical principle, which allows the CO2 pressure to open the valve piston in order to discharge the gas in the protected area.




P/N: F2031002

Material : Brass

Thread : 25E - W21, 8x 1/14"

Test Pressure : 360 Bar

Can be used in Combination with P/N: F1120017

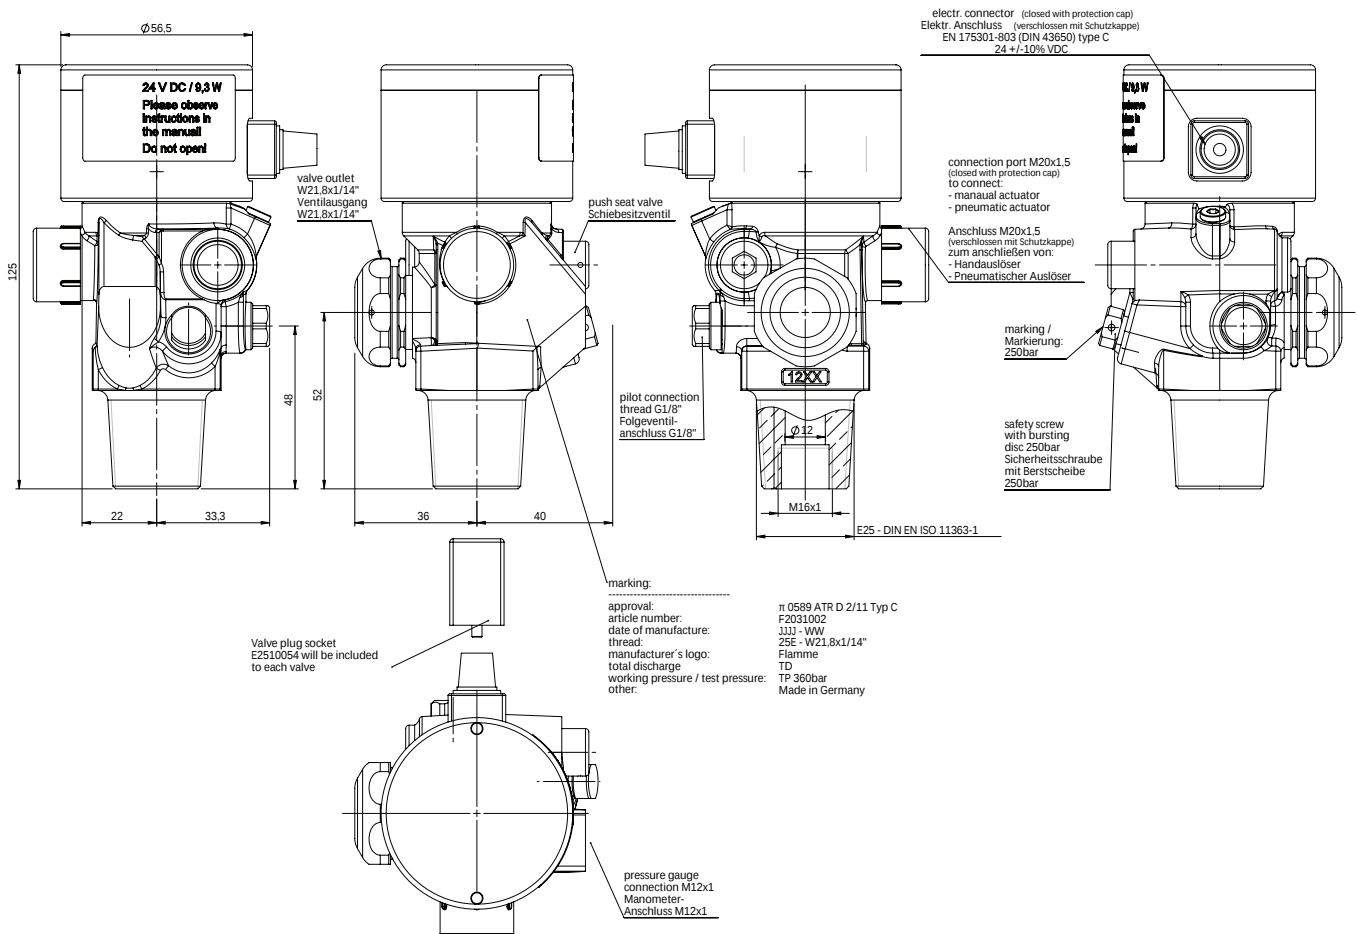

Rev 7: 10/2019

TECHNICAL DATA SHEET

All Pictures and Drawings shown in this document for presentation purpose only. Actual may vary.

In line with our policy of continuous product improvement SFFECO reserves the right to modify specifications without prior notice.

Jeddah Branch:

T: +966 12 670 6009 | F: +966 12 676 0307

jeddah@sffeco.com.sa

Dammam Branch:

T: +966 13 835 1961 | F: +966 13 835 1968

dammam@sffeco.com.sa

Madinah Branch:

T: +966 14 866 0959 | F: +966 14 866 0969

madinah@sffeco.com.sa

www.
SFFECO.com

Carbondioxide

Fire Extinguishing System




CONTROL HEAD VALVE

ELECTRIC ACTUATED CONTROL HEAD VALVE

This type of control head valve operates the system cylinder electrically through electrical pin type pyrotechnic actuators.

Can be used in Combination with F2021002

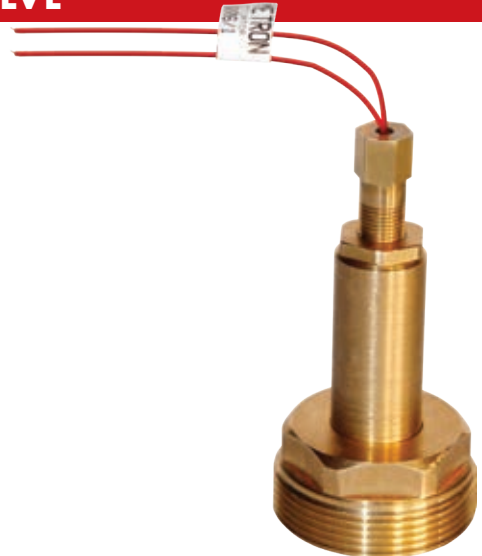

P/N: XF11280

CONTROL HEAD VALVE

PNEUMATIC RELEASE DEVICE



This type of control head valve operates the system cylinder through pneumatic principle, which allows the CO2 pressure to open the valve piston in order to discharge the gas in the protected area.

Material	: Brass
Pilot Pressure min	: Pmin = 20 bar for P1=300bar
Pilot Pressure max	: Pmax = 360 bar
Torque	: 25Nm $\pm$ 2

Can be used in Combination with F2021002



P/N: F1120016

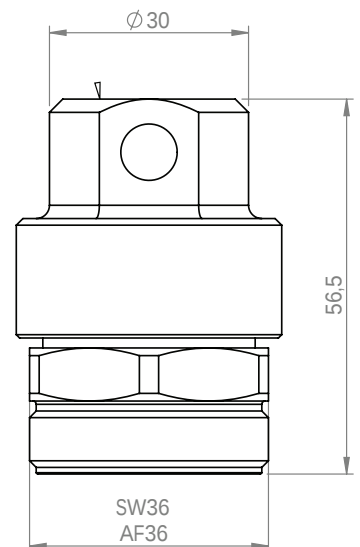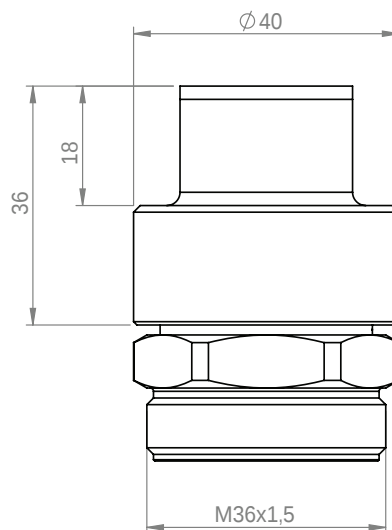

Carbondioxide

Fire Extinguishing System



CONTROL HEAD VALVE




PNEUMATIC - MANUAL RELEASE DEVICE

This type of control head valve operates the system cylinder through pneumatic principle, which allows the CO₂ pressure to open the valve piston in order to discharge the gas in the protected area. The provision of the lever allows the manual operation too.

P/N: F1120015

Material	: Brass
Pilot Pressure min	: Pmin = 8 bar for P1=300bar
Pilot Pressure max	: Pmax = 300 bar
Torque	: 25Nm $\pm$ 2

Can be used in Combination with F2021002

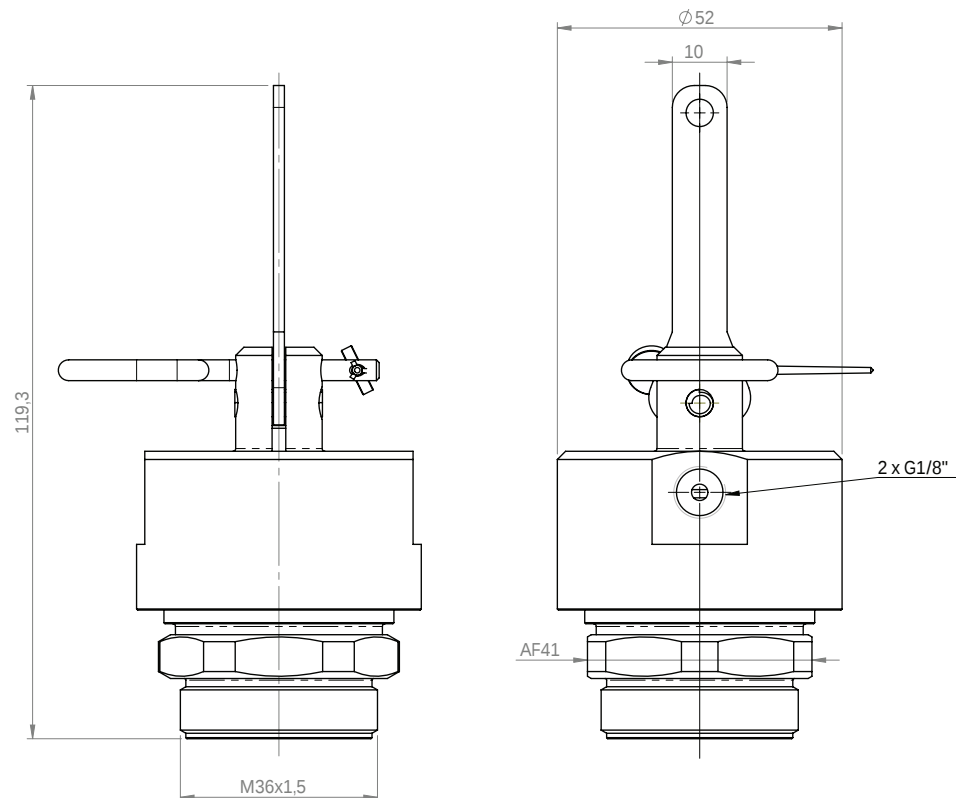

Rev 7: 10/2019

TECHNICAL DATA SHEET

All Pictures and Drawings shown in this document for presentation purpose only. Actual may vary.
In line with our policy of continuous product improvement SFFECO reserves the right to modify specifications without prior notice.

Jeddah Branch:

T: +966 12 670 6009 | F: +966 12 676 0307

jeddah@sffeco.com.sa

Dammam Branch:

T: +966 13 835 1961 | F: +966 13 835 1968

dammam@sffeco.com.sa

Madinah Branch:

T: +966 14 866 0959 | F: +966 14 866 0969

madinah@sffeco.com.sa

www.
SFFECO.com

Carbondioxide

Fire Extinguishing System




CONTROL HEAD VALVE




MANUAL ACTUATOR FOR F203 VALVES

This type of control head valve operates the system cylinder through pneumatic principle, which allows the CO₂ pressure to open the valve piston in order to discharge the gas in the protected area.

Can be used in Combination with F2031002

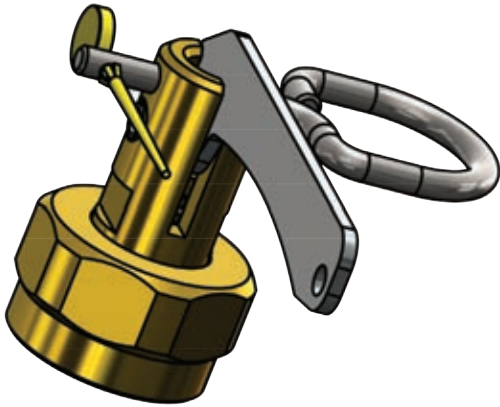

P/N: F1120017

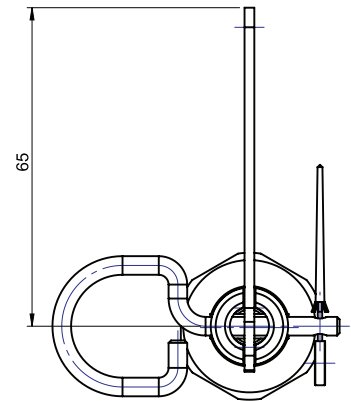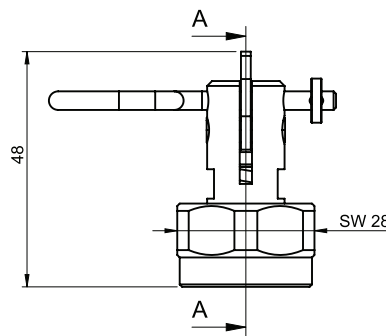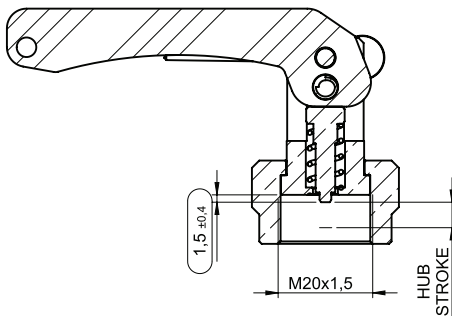

Assembly Instruction:

Assemble the manual actuator only in inactivated state!

(Retracted pin, lever secured with safety pin!)

Screw the manual actuator on the corresponding connection port of valve F203

(Torque: 15 +_1Nm), the alignment of the lever can be orientated in any position

Rev 7: 10/2019

TECHNICAL DATA SHEET

10

All Pictures and Drawings shown in this document for presentation purpose only. Actual may vary.

In line with our policy of continuous product improvement SFFECO reserves the right to modify specifications without prior notice.

SFFECO Factory & Head Office - Riyadh, KSA:

T: +966 11 265 0070 | F: +966 11 265 2190

riyadh@sffeco.com.sa

SFFECO Global Office, Dubai, UAE:

T: +971 4 880 9890 | F: +971 4 880 9822

sales@sffecoglobal.com

www.
SFFECO.com

Carbondioxide


Fire Extinguishing System



DISCHARGE FLEXIBLE HOSE

DESCRIPTION

CO₂ discharge flexible hose is used to convey the CO₂ gas from the outlet of the cylinder to the discharge manifold. This made of reinforced flexible rubber tested at 480 bar to withstand high pressure with stainless steel or brass coupling and swivel joint.

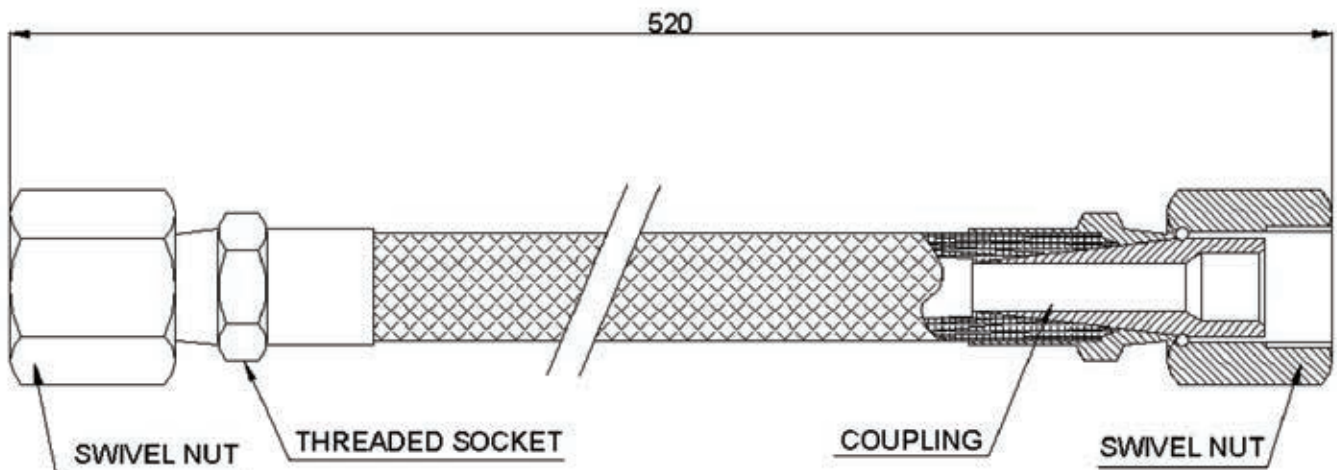

P/N: SCO-006

DIMENSION

Connection : 21.7 x 1.814
Nominal Diameter : 10 mm.

MATERIAL

Hose : Rubber
Couplings : Steel S 300 Cadmied

PRESSURE RATING

Service Pressure : 240 Bar
Test Pressure : 400 Bar
Bursting Pressure : 960 Bar

Rev 7: 10/2019

TECHNICAL DATA SHEET

All Pictures and Drawings shown in this document for presentation purpose only. Actual may vary.
In line with our policy of continuous product improvement SFFECO reserves the right to modify specifications without prior notice.

Jeddah Branch:

T: +966 12 670 6009 | F: +966 12 676 0307

jeddah@sffeco.com.sa

Dammam Branch:

T: +966 13 835 1961 | F: +966 13 835 1968

dammam@sffeco.com.sa

Madinah Branch:

T: +966 14 866 0959 | F: +966 14 866 0969

madinah@sffeco.com.sa

www.
SFFECO.com

Carbondioxide

Fire Extinguishing System




PNEUMATIC FLEXIBLE HOSE

DESCRIPTION

The pneumatic flexible hose is used when two or more cylinders are in use for one system. The first cylinder is actuated through electric actuator while the rest of cylinders will be pneumatically operated through the pneumatic hose.

Hose are interconnected on the ports of the pressure actuators. The CO₂ gas pressure applied on the actuators opens the cylinder valves simultaneously.

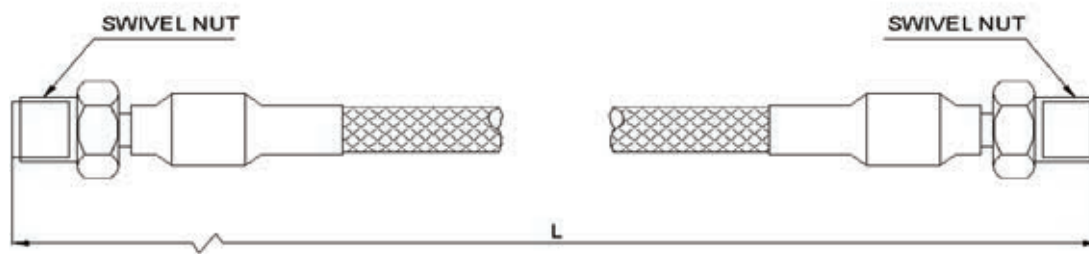

P/N: SCO-007

MATERIAL

Hose	: Rubber
Couplings	: Steel S 300 Cadmied

PRESSURE RATING

Service Pressure	: 240 Bar
Test Pressure	: 400 Bar
Bursting Pressure	: 960 Bar

DIMENSION

Connection	: 1/8" BSP
------------	------------

Carbondioxide


Fire Extinguishing System



NON RETURN VALVE

DESCRIPTION

The Check Valve is used to isolate the "Main and Reserve" supplies in a SFFECO Carbon Dioxide system. The Check Valve prevents pressurization of the "Reserve Bank" of Carbon Dioxide cylinders by blocking the flow of agent from the "Main" system discharge piping. This allows a common discharge manifold and nozzle piping network to be used on "Main and Reserve" system installations.

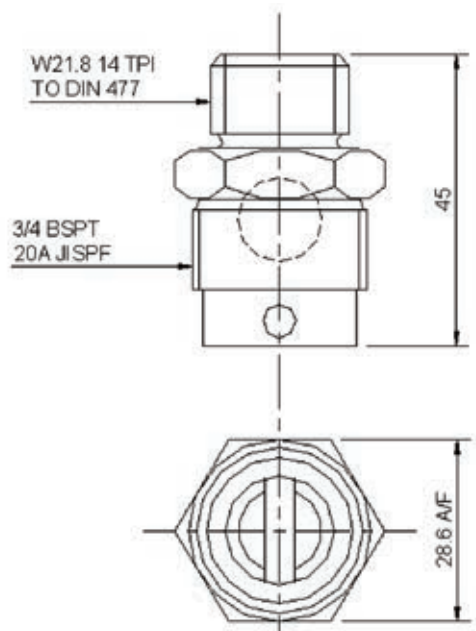

P/N: SCO-008

MATERIAL

Valve Body	: Brass
Ball	: Carbon Steel
Maximum Pressure	: 250 Bar

Rev 7: 10/2019

TECHNICAL DATA SHEET

All Pictures and Drawings shown in this document for presentation purpose only. Actual may vary.

In line with our policy of continuous product improvement SFFECO reserves the right to modify specifications without prior notice.

Jeddah Branch:

T: +966 12 670 6009 | F: +966 12 676 0307

jeddah@sffeco.com.sa

Dammam Branch:

T: +966 13 835 1961 | F: +966 13 835 1968

dammam@sffeco.com.sa

Madinah Branch:

T: +966 14 866 0959 | F: +966 14 866 0969

madinah@sffeco.com.sa

www.
SFFECO.com

Carbondioxide


Fire Extinguishing System



DISCHARGE MANIFOLD

DESCRIPTION

The Check Valve is used to isolate the "Main and Reserve" supplies in a SFFECO Carbon Dioxide system. The Check Valve prevents pressurization of the "Reserve Bank" of Carbon Dioxide cylinders by blocking the flow of agent from the "Main" system discharge piping. This allows a common discharge manifold and nozzle piping network to be used on "Main and Reserve" system installations.

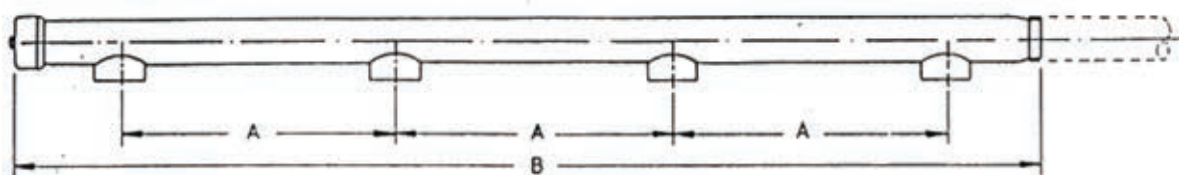

CYLINDER SIZE	DIM. "A" (MM)	DIM. "B" (MM)				
		2 CYL.	3 CYL.	4 CYL.	5 CYL.	6 CYL.
100 lbs.	305	625	930	1235	1540	1845

SPECIFICATION

- Manifold and discharge piping sizes are calculated by computer to comply with NFPA Standards and are dependent on the pipe work configuration.
- All manifolds are supplied with end mounted discharge outlets.
- The integral non-return valve is a fold away flap type to ensure minimum orifice restriction.
- Material to B.S. 5306 Part 5 Section 10.3.3. Proof Test 90 Bar.

Rev 7: 10/2019

TECHNICAL DATA SHEET

Carbondioxide


Fire Extinguishing System



RADIAL NOZZLE

DESCRIPTION

The SFFECO radial nozzle (P/N SCO10-009) is used for Total Flooding applications to deliver the agent into the hazard area protected by Carbon Dioxide system. Nozzles are made of brass or stainless steel in different types, shapes and diameters to assure the effectiveness of extinguishing agents as per system design and quantity of gas required.

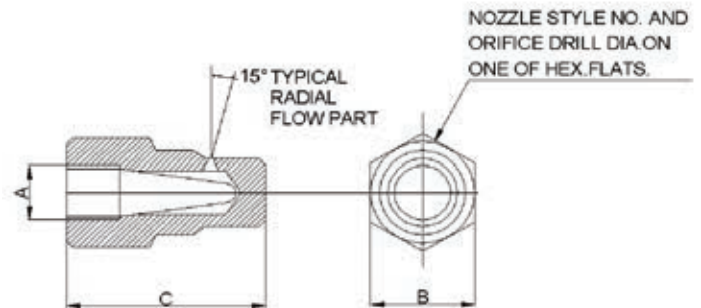

1-PORT 360 DEG.



2-PORT 90 DEG.



3-PORT 180°



4-PORT

NOZZLE SIZE			PURCHASE CODE
A	B	C	
1/6"	7/8"	1 23/32"	0678
3/8"	1"	1 27/32"	0679
1/2"	1 1/8"	2 1/16"	0680
3/4"	1 3/8"	2 5/16"	0681
1"	1 5/8"	2 11/16"	0682
1 1/4"	2	3 1/16"	0683
1 1/2"	2 1/4"	3 7/16"	0684
2"	3"	3 15/16"	0685

P/N: SCO10-009

NOTE

While placing order, please refer to the flow calculations and mention nozzle size and drill properly

'S' TYPE DISCHARGE NOZZLE

DESCRIPTION


The SFFECO 'S' type discharge nozzle (P/N SCO-010) is used for Local and Total Flooding applications to deliver the agent into the hazard area protected by Carbon Dioxide system.

Nozzles are made of brass in different types, shapes and diameters to assure the effectiveness of extinguishing agents as per system design and quantity of gas required.

MATERIAL

Body: Brass, Finish : Red Paint

P/N: SCO-010

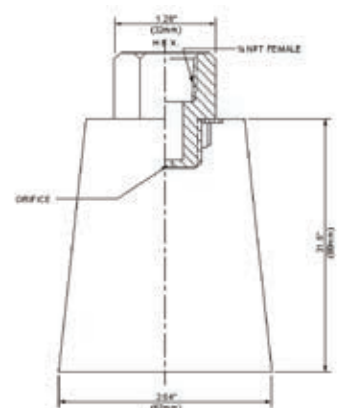

Rev 7: 10/2019

TECHNICAL DATA SHEET

All Pictures and Drawings shown in this document for presentation purpose only. Actual may vary.

In line with our policy of continuous product improvement SFFECO reserves the right to modify specifications without prior notice.

Jeddah Branch:

T: +966 12 670 6009 | F: +966 12 676 0307

jeddah@sffeco.com.sa

Dammam Branch:

T: +966 13 835 1961 | F: +966 13 835 1968

dammam@sffeco.com.sa

Madinah Branch:

T: +966 14 866 0959 | F: +966 14 866 0969

madinah@sffeco.com.sa


www.
SFFECO.com

Carbondioxide

Fire Extinguishing System



ABORT SWITCH (Optional)

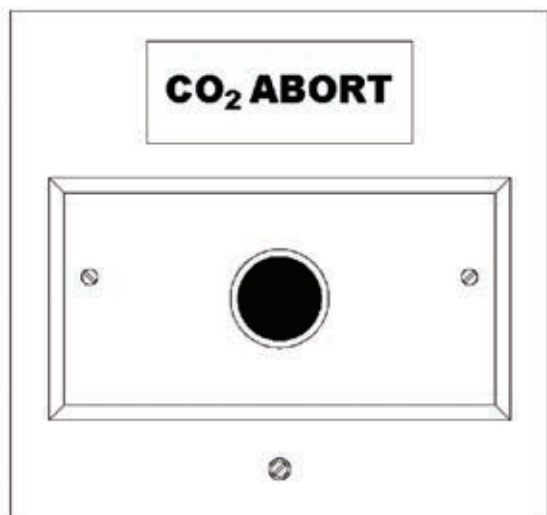

P/N: SCO-014


DESCRIPTION

The System Abort Switch is designed to be in conjunction with other system equipment. It provides a temporary means, by which the system actuation circuit may be interrupted, when operated prior to the circuit actuation. The unit employs a non-latching contact push button switch. While depressed, the switch causes the agent release circuit to be manually delayed. Upon release of the Abort Switch, the release circuit will follow the specific configuration of the system control panel.

DIMENSIONS

Width	87 mm
Height	87 mm
Depth	52 mm

MAIN – RESERVE SWITCH (Optional)

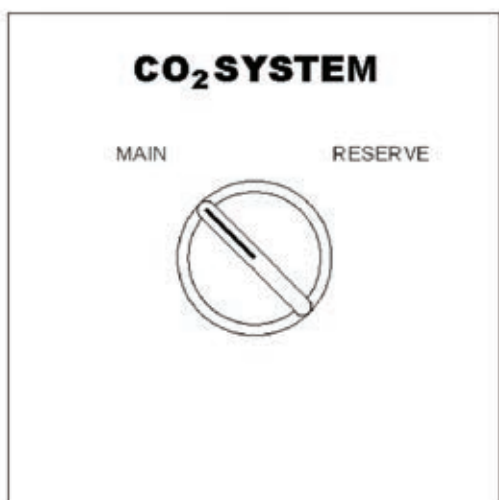

DESCRIPTION

The "Main" to "Reserve" switch is used with systems that incorporate main and reserve (back-up) agent storage. The switch may utilize 1 or 2 Form "C" Contact blocks which will provide an electrical path to either the "Main" or "Reserve" releasing modules.

Following a system discharge, reset any field devices. Once all devices are in a stand-by status the Main-Reserve Switch may be moved to the "Reserve" position. The Control Panel may then be reset to a normal mode for uninterrupted SFFECO protection. The empty "main" containers can be removed for recharge. After the containers in the "Main" system have been recharged, the switch may be returned to the "Main" position.

The switch may be mounted to a standard 4" electrical box or others.

DIMENSIONS

Width	105 mm
Height	105 mm
Depth	75 mm

Rev 7: 10/2019

TECHNICAL DATA SHEET

Carbondioxide

Fire Extinguishing System



WARNING SIGNS

Application

Instructional signs are provided to inform personnel of any potential hazards they face when operation certain devices or working within areas protected by CO₂ systems.



Optional: Sign in every nearby space where carbon dioxide could accumulate to hazardous levels.





Optional: Sign outside each entrance to carbon dioxide storage room



Optional: Sign at every entrance to protected space for systems provided with a wintergreen odorizer.


This type of warning signs are as per latest NFPA editions, before they were like

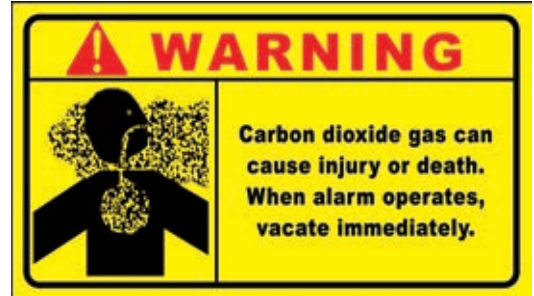


Sign in Every Protected Space.



Sign at Every Entrance to Protected Space

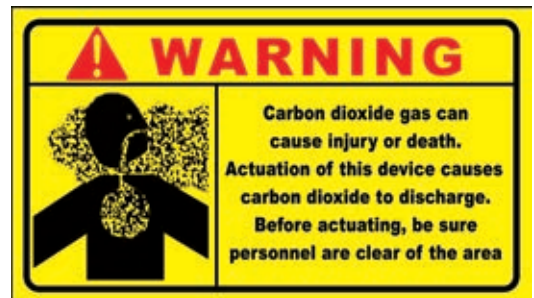

Sign at Every Manual Actuation Station

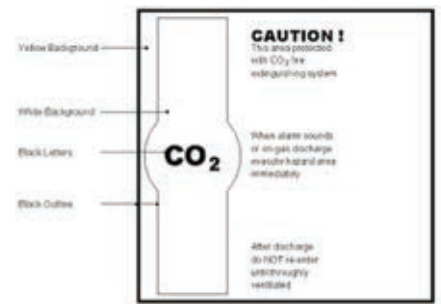

Rev 7: 10/2019

TECHNICAL DATA SHEET

All Pictures and Drawings shown in this document for presentation purpose only. Actual may vary.

In line with our policy of continuous product improvement SFECO reserves the right to modify specifications without prior notice.

Jeddah Branch:

T: +966 12 670 6009 | F: +966 12 676 0307

jeddah@sffeco.com.sa

Dammam Branch:

T: +966 13 835 1961 | F: +966 13 835 1968

dammam@sffeco.com.sa

Madinah Branch:

T: +966 14 866 0959 | F: +966 14 866 0969

madinah@sffeco.com.sa


www.
SFECO.com

Carbondioxide

Fire Extinguishing System



TYPICAL ARRANGEMENT

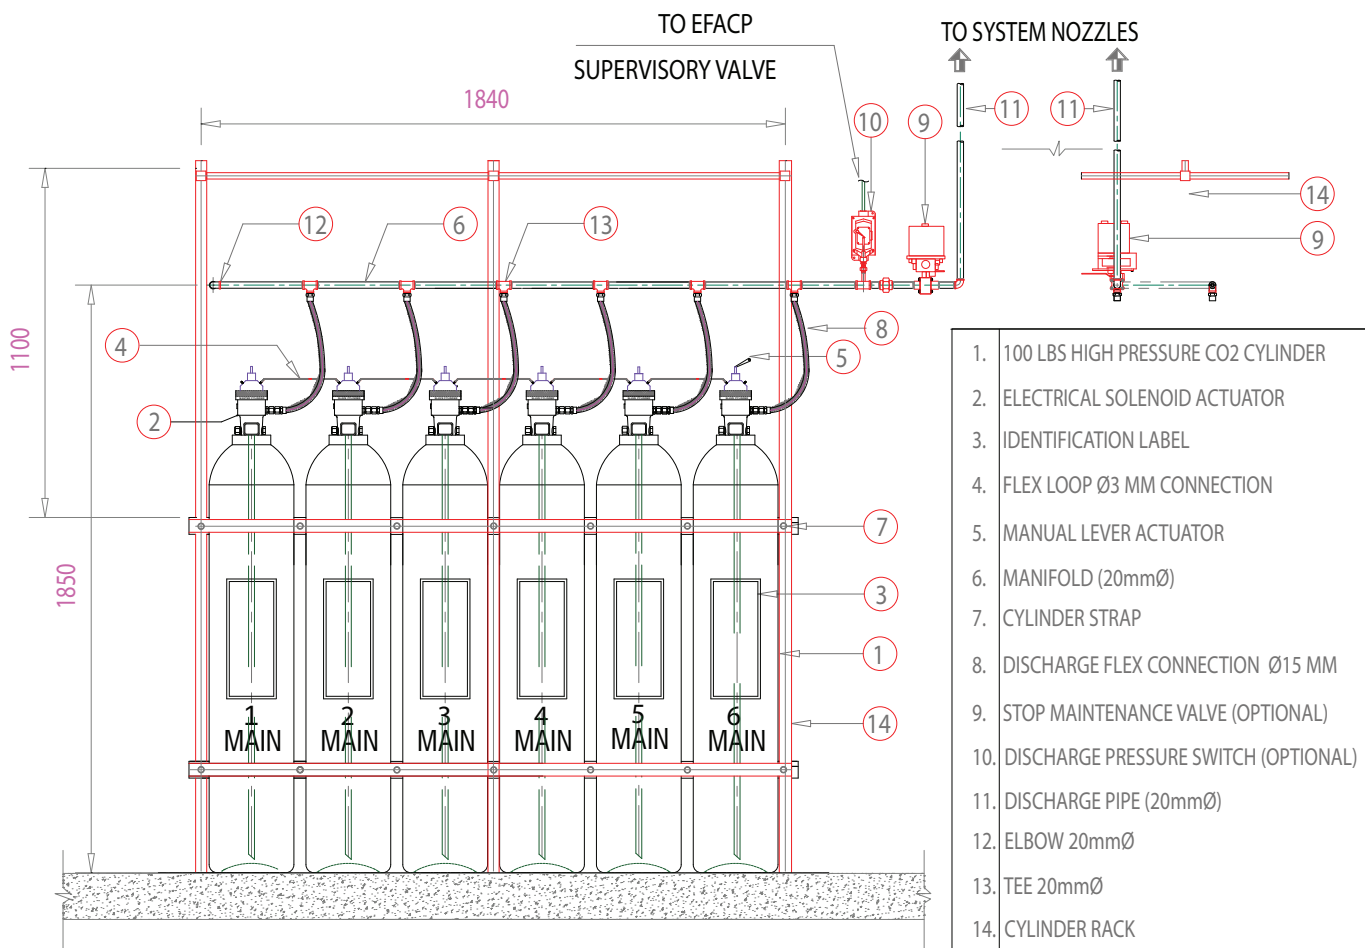

Optional:

- Rack Assembly
- Directional Valve

General Note: These data sheets are the property of SFFECO. It shall not be reproduced, copied, lent in any manner or used for any other purpose other than that for which it is specially furnished, except by written permission of SFFECO.

شركة المصنع السعودي لأجهزة الإطفاء
SAUDI FACTORY FOR FIRE EQUIPMENT Co.



FIRE
HOSE REEL



FIRE HOSE



PUMPS



BLADDER
TANKS



FIRE
CABINETS



FUEL TANKS



SFFECO
KITCHENHOOD
SYSTEM



SFFECO227
Utilise
HFC - 227ea
Clean Agent Gas (UL/FM)




CO2
SYSTEM



TROLLEY / MODULAR
EXTINGUISHERS



FIRE DOORS
AND FRAMES

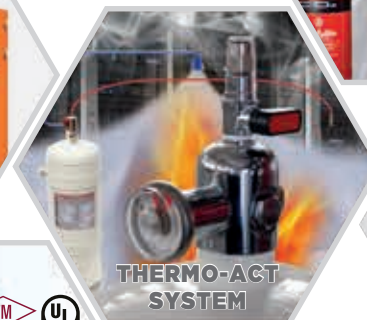

THERMO-ACT
SYSTEM



PORTABLE
EXTINGUISHERS



FOAM
CONCENTRATES



HYDRANTS

In line with our policy of continuous product improvement, SFFECO reserves the right to modify specifications without prior notice.

Factory & Head Office - Riyadh

2nd Industrial Area, Al-Kharj Road, Riyadh, KSA
P.O. Box: 58469, Riyadh 11515
Tel : +966 11 2650070, Fax: +966 11 2652190
E-mail: riyyadh@sffeco.com.sa

SFFECO Global - Dubai

P.O. Box: 261318, JAFZA South, Dubai U.A.E.
Tel: +971 4 880 9890, Fax: +971 4 880 9822
E-mail: sales@sffecoglobal.com

Jeddah Branch

P.O. Box: 16769, Jeddah – 21474, KSA
Tel : +966 12 670 6009, Fax: +966 12 676 0307
E-mail: jeddah@sffeco.com.sa

Dammam Branch

P.O. Box: 7162, Dammam – 31462, KSA
Tel : +966 13 8351961, Fax: +966 13 8351968
E-mail: dammam@sffeco.com.sa

Madinah Branch

Tel : 0148660959, 0148283256, Fax: 0148660969
E-mail: madinah@sffeco.com.sa



WWW.
SFFECO.com